

H-SERIES

AIR-COOLED* TWO-STAGE



60 HZ

Dimensions and Specifications

Typical, do not use for construction. (Drawings are provided with order acknowledgement.)

Model	Motor HP	Max. Pressure PSID	Free Air** Delivery CFM	Length In.	Width In.	Height In.	Net Weight Lbs.
KNWA00-A/H	25	125	72	85	36	68	2260
KNWA00-B/H	30	125	91	85	36	68	2390
KNWA00-C/H	40	125	122	85	36	68	2480
KNWA00-D/H	50	125	162	85	36	68	2610
KNWA0-A/H	50	150	172	69	50	67	3670
KNWA0-B/H	60	150	223	69	50	67	3740
KNWA0-C/H	75	150	292	69	50	67	3880
KNWA0-D/H	100	135	331	69	50	67	3910
KNWA0-E/H	100	135	400	69	50	67	3990
KNWA1-A/H	100	150	413	100	63	74	5620
KNWA1-B/H	125	150	504	100	63	74	5970
KNWA1-C/H	125	150	534	100	63	74	5970
KNWA1-D/H	150	150	618	100	63	74	6220
KNWA1-E/H	150	150	653	100	63	74	6220
KNWA1-F/H	200	135	728	100	63	74	6460
KNWA1-G/H	200	135	812	100	63	74	6460
KNWA2-A/H	200	150	908	124	75	110	10000
KNWA2-B/H	250	150	1096	124	75	110	10200
KNWA2-C/H	300	150	1310	124	75	110	11000
KNWA2-D/H	350	150	1552	124	75	110	11600

For water cooled requirements, refer to Bulletin KNW/L & KNW/H.

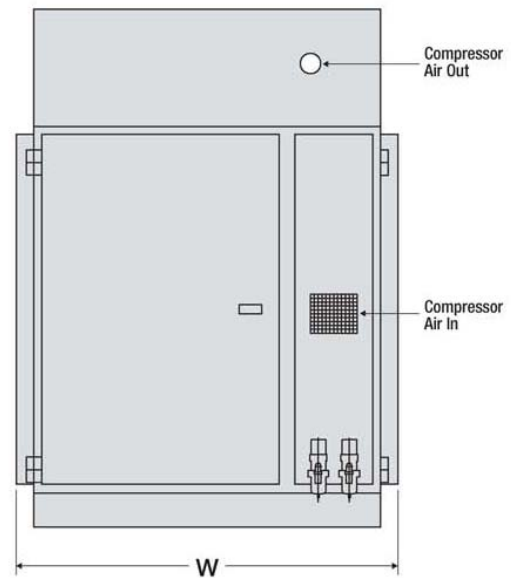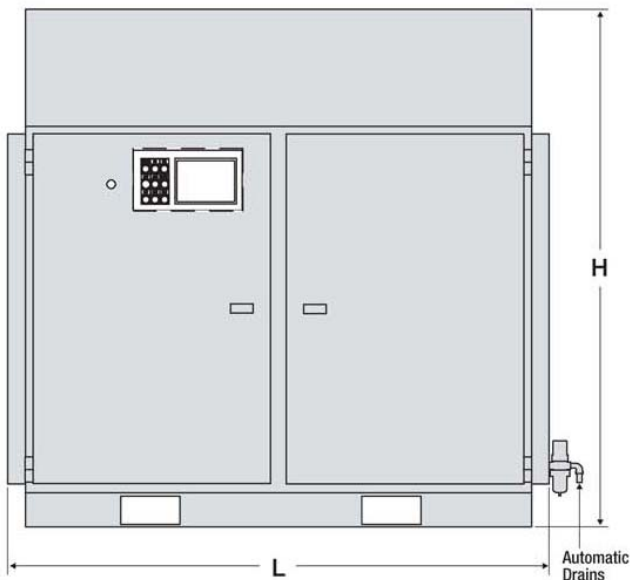

KNWA/H (1211)