

### H-SERIES

#### WATER-COOLED\* TWO-STAGE


**60 HZ**

#### Dimensions and Specifications

*Typical, do not use for construction. (Drawings are provided with order acknowledgement.)*

Model	Motor HP	Max. Pressure PSID	Free Air** Delivery CFM	Length In.	Width In.	Height In.	Net Weight Lbs.
KNW00-A/H	25	125	72	85	36	61	2190
KNW00-B/H	30	125	91	85	36	61	2320
KNW00-C/H	40	125	122	85	36	61	2410
KNW00-D/H	50	125	162	85	36	61	2540
KNW0-A/H	50	150	172	70	49	54	3050
KNW0-B/H	60	150	223	70	49	54	3200
KNW0-C/H	75	150	292	70	49	54	3250
KNW0-D/H	100	135	331	70	49	54	3330
KNW0-E/H	100	135	400	70	49	54	3330
KNW1-A/H	100	150	413	100	63	60	5180
KNW1-B/H	125	150	504	100	63	60	5370
KNW1-C/H	125	150	534	100	63	60	5390
KNW1-D/H	150	150	618	100	63	60	5720
KNW1-E/H	150	150	653	100	63	60	5740
KNW1-F/H	200	135	728	100	63	60	5960
KNW1-G/H	200	135	812	100	63	60	6040
KNW2-A/H	200	150	908	124	75	72	9420
KNW2-B/H	250	150	1096	124	75	72	9670
KNW2-C/H	300	150	1310	124	75	72	10350
KNW2-D/H	350	150	1552	124	75	72	10930
KNW3-A/H	400	135	1765	139	82	92	12970
KNW3-B/H	450	135	1936	139	82	92	13260
KNW3-C/H	500	135	2155	139	82	92	13640

For air cooled requirements, refer to Bulletin KNWA/L & KNWA/H

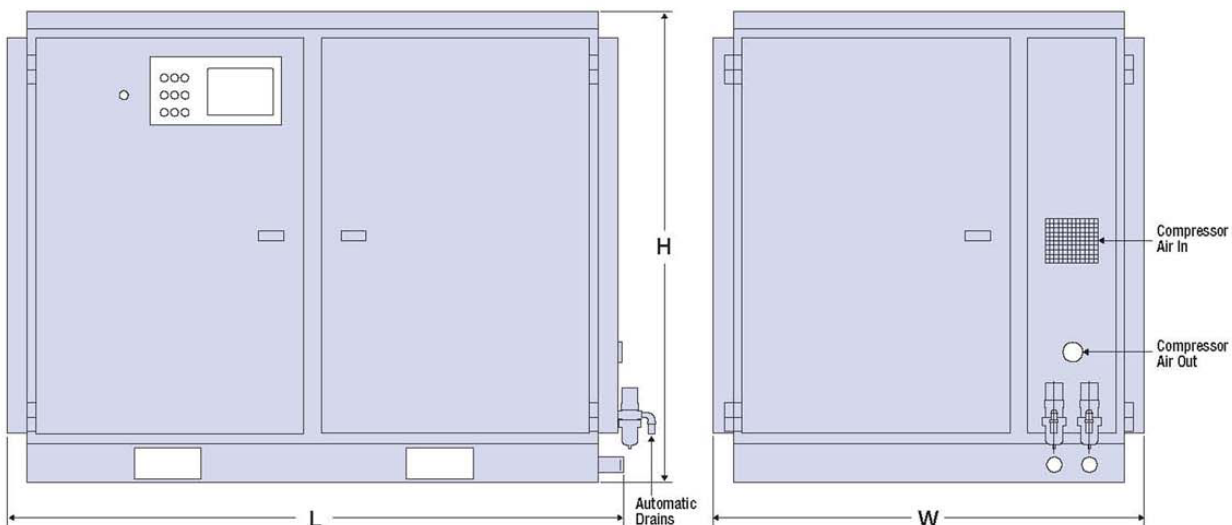

**KNW/H (1211)**